

A3716

On-line Monitoring System



... Your best partner for vibration diagnostics

A3716 On-line Monitoring System

The A3716 is powerful online monitoring and diagnostics system for strategic rotating machinery. The A3716 system can operate as an independent monitoring system or it can be used as extension of an existing protection system.

Each A3716 module contains 16 AC, 16 DC, and 4 TACHO inputs. All channels are measured simultaneously. Single A3716 modules can be easily combined to create up to a 64 channel system.



● Real time data viewer A3760



- A3716-3U:**
- 16 channels AC
 - 16 channels DC
 - 4 independent TACHO inputs
 - 16 BNC outputs of signals from sensors
 - 16 programmable relays outputs
 - 16 programmable 4-20 mA outputs




- A3716-2U:**
- 16 channels AC
 - 16 channels DC
 - 4 independent TACHO inputs



Example using 3 pieces of A3716 2U monitoring system on site



View from the back - connection of units

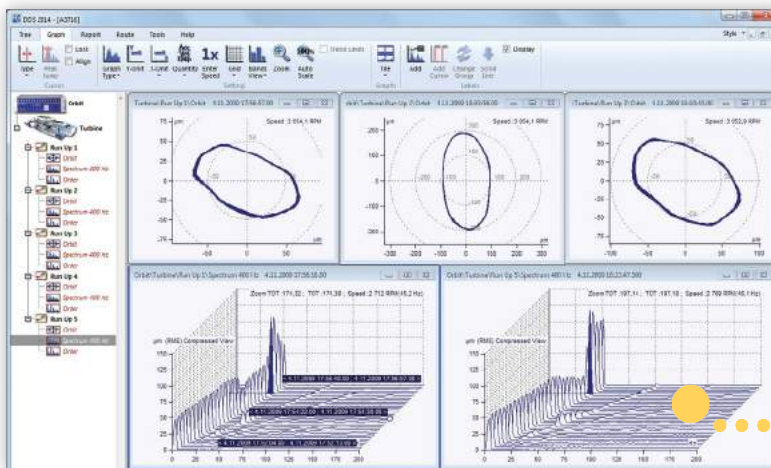

DDS 2014 Software

The A3750 software is designed for controlling data collection and archiving data, and allows the user to easily configure required measurements.

The A3760 software is designed for real time data viewing in control rooms.

The DDS 2014 software is designed for analyzing and archiving all collected data.



Check the condition of your machines continuously

Adash 3716 Technical Specifications:

Input channels AC:	<ul style="list-style-type: none"> • 16 AC, ICP® power supply on/off • input impedance 100kΩ • integration single, double • high pass filter 1 Hz - 12800 Hz • low pass filter 25 Hz - 25600 Hz 	Data acquisition:	<ul style="list-style-type: none"> • Overall values • Time signals • FFT real time analysis • DEMOD - ENVELOPE analysis • ACMT - low speed bearing analysis • order analysis • user band pass analysis • RPM measurement • DC measurement • Orbit measurement • Speed measurement
Input channels DC:	<ul style="list-style-type: none"> • 16 DC for process values • input impedance 100 kΩ (VDC), 250 Ω (mADC) 		
TACHO inputs:	<ul style="list-style-type: none"> • 4 independent TACHO for external trigger • speed range 0,8 Hz - 1000 Hz 		
Input range:	<ul style="list-style-type: none"> • AC +/- 12 V peak-peak • DC +/- 24 V or 4 - 20 mA • TACHO +10V 	Signal Recorder:	<ul style="list-style-type: none"> • 64 kHz sampling frequency • 4 Ch memory consumption 3 GB/hour • 4 Ch total recording - 35 hours
AD conversion:	<ul style="list-style-type: none"> • 24 bit, 64 bit double floating point internal signal processing • No AutoGain function! 	Trigger:	<ul style="list-style-type: none"> • free run, TACHO, external (voltage)
Dynamic range S/N:	<ul style="list-style-type: none"> • 120 dB 	Communication:	<ul style="list-style-type: none"> • Ethernet 1GB RJ45
Frequency ranges:	<ul style="list-style-type: none"> • max. 25,6 kHz (16 Ch, 65,5 kHz sampling) 	Temperature range:	<ul style="list-style-type: none"> • -10°C to +50°C
Sampling mode:	<ul style="list-style-type: none"> • fully simultaneous for 16 channels 	Power:	<ul style="list-style-type: none"> • AC 110 - 240 V, 45 - 65 Hz
FFT resolution:	<ul style="list-style-type: none"> • min. 100 lines • max. 25600 lines 	Case:	<ul style="list-style-type: none"> • 19" aluminum rack
Processor:	<ul style="list-style-type: none"> • Intel Core2 - 2.5 GHz 	Size & Weight (2U):	<ul style="list-style-type: none"> • 430 x 360 x 90 mm • 4,7 kg
Memory RAM:	<ul style="list-style-type: none"> • 4 GB 	Size & Weight (3U):	<ul style="list-style-type: none"> • 430 x 360 x 135 mm • 6,2 kg
Internal data disc:	<ul style="list-style-type: none"> • SSD 128GB 		



Contact us

info@adashamerica.com
 tel.: (888) 817 4335
 fax.: (480) 393 4830



Adash America
 PO Box 278
 Nipomo, CA 93444

